







Glazing system - product card

The glass sliding panel system combines functionality and elegant design. The panels provide protection against adverse weather conditions: wind, rain, snow, dirt and noise, without limiting visibility. The system consists of 4 or 5 tracks allowing 4 to 10 sliding panels to be used. The glass used in the system is hardened and safe to use, available in three thicknesses: 8, 10 and 12 mm. The system is available in two versions: a non-framework version and the system with inter glazing profiles. The non-framework sliding panels are almost invisible when closed. The framework system, however, ensures greater sealing. Easy to install and offering many benefits, the system fits in any architectural context and can be installed in a variety of spaces, such as terraces, balconies, terraces, loggia and conference rooms. The glass system allows us to extend the season from early spring to late autumn.

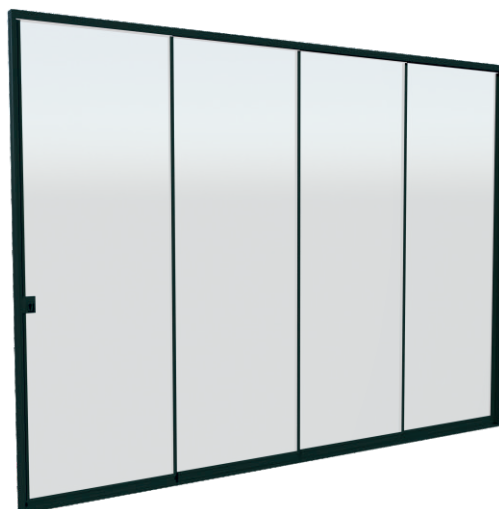

GLAZING SYSTEM 4 TRACKS - 4 GLASS




STANDARD COLOURS

-  9010ST
Colour cream-white
similar to RAL9010
-  9007ST
Colour grey aluminium
similar to RAL9007
-  7016ST
Colour anthracite-metallic
similar to RAL7016


ADDITIONAL COLOURS

-  Any colour from the
RAL palette
-  Wood-like varnish


VERTICAL SECTION

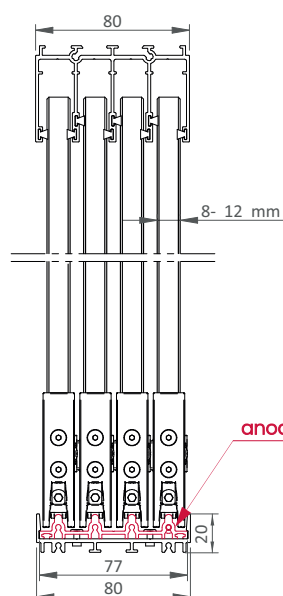


VIEW FROM THE TOP the system without inter glazing profile

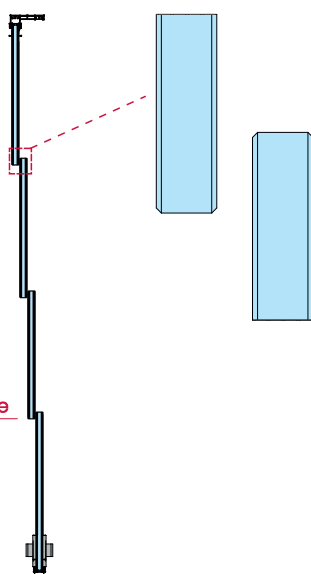


VIEW FROM THE TOP the system with inter glazing profile

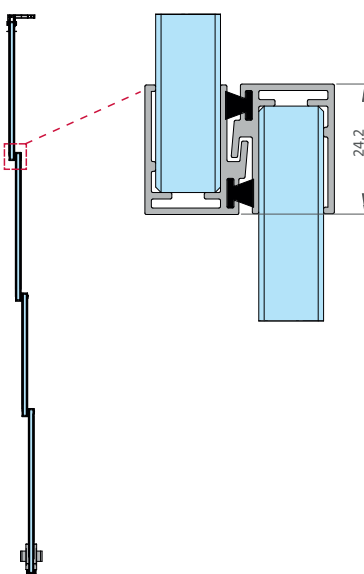


TOP VIEW system with gasket between the sheets

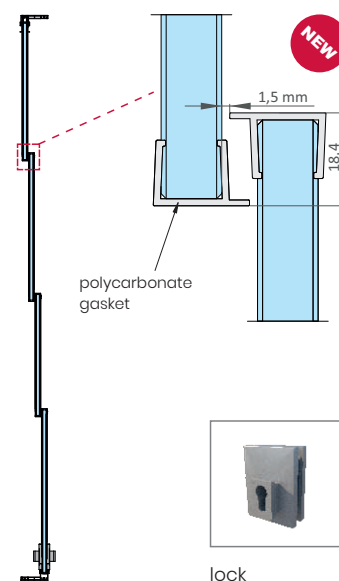

OPENING SINGLE-SIDED

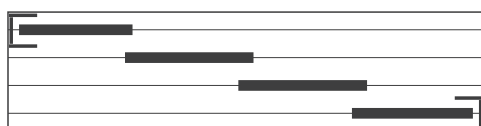

Additional option - 3 panes on 4 tracks

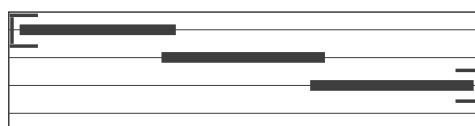


Minimum width of a pane 50 cm.

Maximum width of a pane 120 cm.




Dimmed (smoked) glass - is available on request.

*Fixed glazing is possible after consultation with Customer Service Desk.

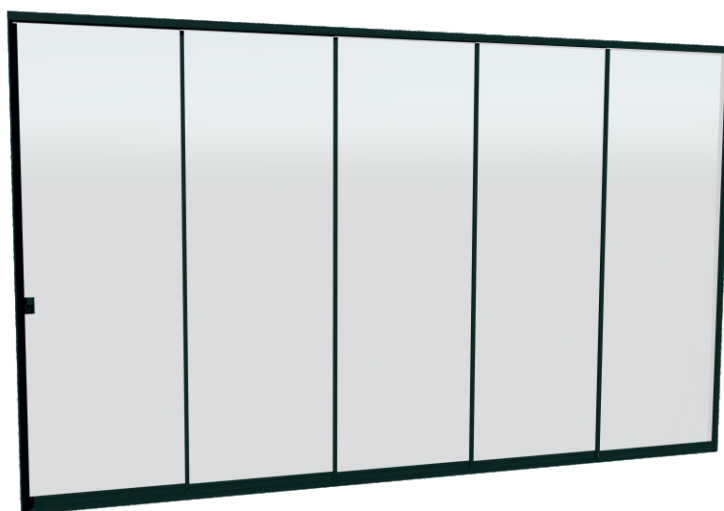

GLAZING SYSTEM 5 TRACKS – 5 GLASS




STANDARD COLOURS

-  9010ST
Colour cream-white
similar to RAL9010
-  9007ST
Colour grey aluminium
similar to RAL9007
-  7016ST
Colour anthracite-metallic
similar to RAL7016


ADDITIONAL COLOURS

-  Any colour from the
RAL palette
-  Wood-like varnish


VERTICAL SECTION

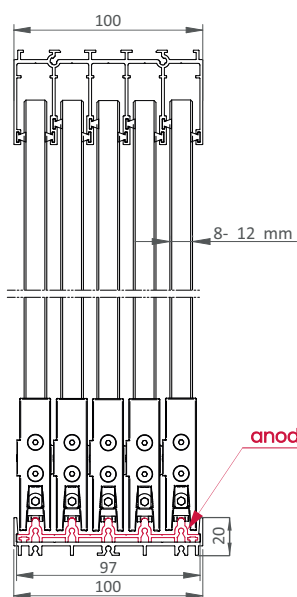


VIEW FROM THE TOP the system without inter glazing profile

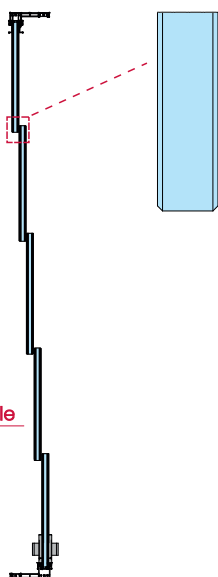

VIEW FROM THE TOP the system with inter glazing profile

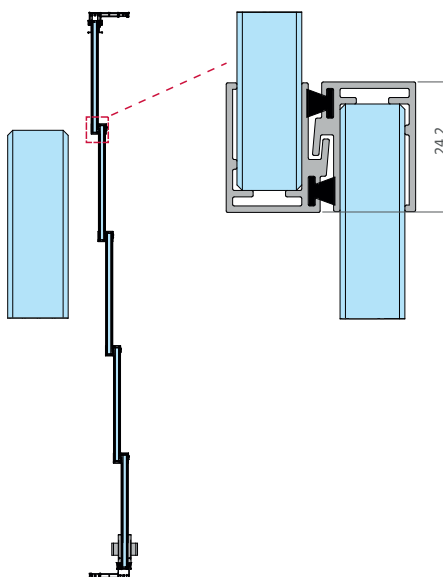

TOP VIEW system with gasket between the sheets

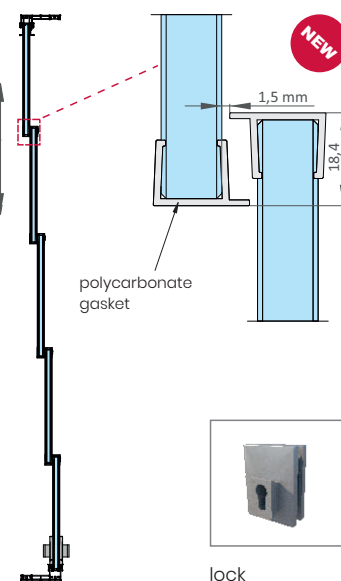

OPENING SINGLE-SIDED




Minimum width of a pane 50 cm.

Maximum width of a pane 120 cm.




Dimmed (smoked) glass - is available on request.

*Fixed glazing is possible after consultation with Customer Service Desk.

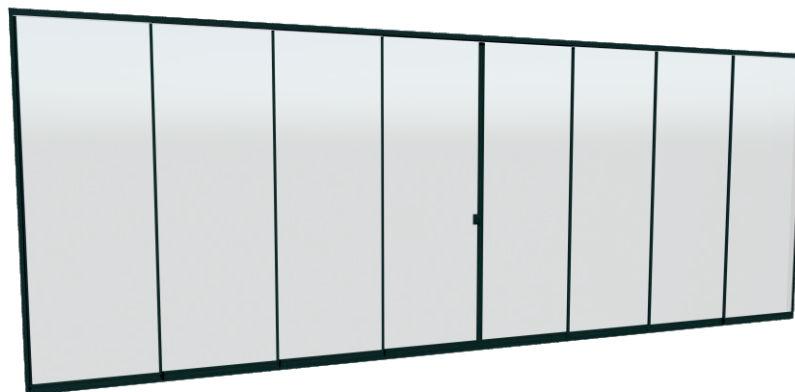

GLAZING SYSTEM 4 TRACKS (6 GLASS, 8 GLASS), 5 TRACKS 10 GLASS




STANDARD COLOURS

-  9010ST
Colour cream-white
similar to RAL9010
-  9007ST
Colour grey aluminium
similar to RAL9007
-  7016ST
Colour anthracite-metallic
similar to RAL7016


ADDITIONAL COLOURS

-  Any colour from the
RAL palette
-  Wood-like varnish


VERTICAL SECTION 4 TRACKS, 5 TRACKS

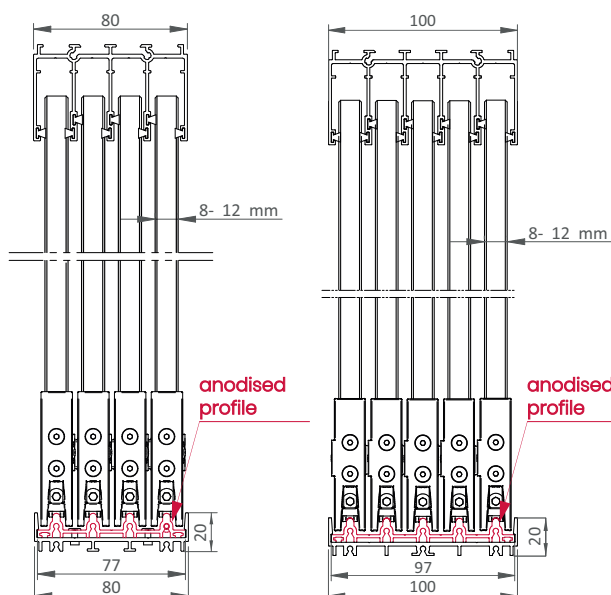


VIEW FROM THE TOP the system without inter glazing profile




VIEW FROM THE TOP the system with inter glazing profile



GLAZING CLOSING

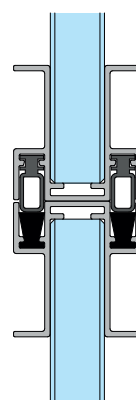

TOP VIEW SYSTEM WITH GASKET BETWEEN THE SHEETS




polycarbonate
gasket




lock

OPENING DOUBLE-SIDED


4 tracks, 6 glass



4 tracks, 8 glass



5 tracks, 10 glass



Minimum width of a pane 50 cm, maximum width of a pane 120 cm. Dimmed (smoked) glass - is available on request.

*Fixed glazing is possible after consultation with Customer Service Desk.



Contact:

phone: +48 607 189 400

+48 502 342 842

e-mail: export@tarasola.com

www.tarasola.com